



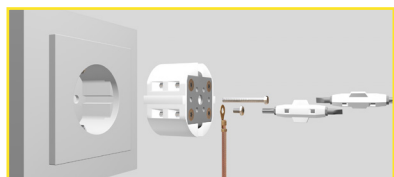

- grounding plug for earthed sockets (Schuko)
- grounding system for use with versatile different grounding cables
- connection of up to four grounding cables



Order-No.: 711076
Short-Desc.: ESR-SA

Grounding system ESR

Grounding plug ESR-SA

Technical data

colour:	white
diameter:	37 mm
height without cover:	21 mm
height with cover:	29 mm
overhang / projection above socket:	8 mm




Scope of delivery

grounding plug Schuko adapter ESR-SA
2 x countersunk screw Torx T20 - M4 x 8 mm
4 x panhead screw Torx T20 - M4 x 6 mm
4 x toothed lock washer M4
1 x slotted cheese head screw - M3 x 37 mm
1x slotted cheese head screw - M2.5 x 37 mm

Scope of application

desk furniture, cable ducts, small metal trim strips, shielding textiles, shielding fleeces, notebooks, routers, etc.

to be used in combination with ESR cables ST, USB, DK, K

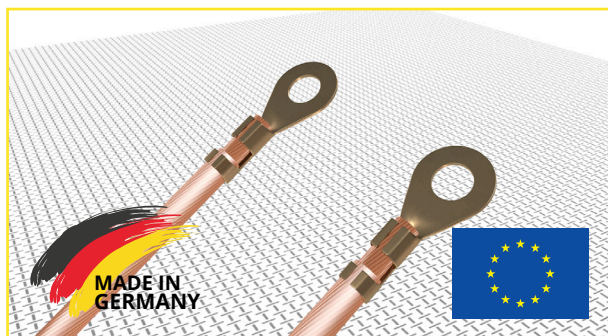

Order-No.: 711068
Short-Desc.: ESR-ST-Cable

Grounding system ESR

Grounding cable ESR-ST-Cable

Technical data

colour:	transparent
length:	350 cm ± 2 %
cable:	H07V-K 2,5 mm ²
ring eyelets:	M4 / 2,5 mm ² M5 / 2,5 mm ²

Scope of delivery

grounding cable ESR-ST cable
1 x grommet - rim: 1 mm outer diameter: 8 mm; inner diameter: 3 mm
1 x cable binder - length: 100 mm; width: 2.5 mm
2 x screw - pan head screw cross self-tapping - 3.5 x 13 mm
1 x cable clamp open diameter: 3.2 mm; Hole: 4.0 mm
1 x grounding marker - diameter: 15 mm