Building Biology Products
and services

Shielded lamps




## Product sheet - Shielded lamps

# Pendant Lamp VERONA

## Technical data

| | |
|---|---|
| Colour shade: | Opal glass, white |
| Colour electrical kit: | brushed steel, cable white |
| Operating voltage: | 230 VAC / 50 Hz |
| Dimensions: | see drawing |
| Light source LED: | 1 x LM-LED-G9-55 (5,5 Watt) 485 lm (≈ 41 W) max. 10 Watt |
| Cable: | 200 cm, 3 x 0,75 mm² shielded |
| Frame size: | E27 (adapter to G9 incl.) |
| Protection class: | 1 (With ground wire) |
| Shielding alternating electric field: | all components of metal, protection class 1 |
| Shielding basket: | 1 x Spiral stainless steel |

- The **Verona pendant light** combines timeless elegance and high-quality materials with sophisticated technology in a harmonious design. The slender cylinder, crafted from frosted opal glass, ensures an even, glare-free light distribution, creating a cosy atmosphere in living, dining and workspaces.


  The cylinder is made of high-quality opal glass that distributes light evenly across its entire surface to produce a calm, cosy lighting effect. Thanks to its clean lines, the ‚Verona' blends harmoniously into both modern and classic interior styles.

  The light fixture consists of two perfectly coordinated components.

  **Shielded pendant electrical assembly and opal glass cylinder.**

  The shielded pendant assembly significantly reduces alternating electric fields in the living area, thereby contributing to an electrobiologically optimised living environment.

- The shielded electrical assembly of the ‚Verona' luminaire significantly falls below the requirements of the TCO'99 guideline (MPR II, DIN EN 50279) in all measurement procedures. Tested according to: TCO'99 (MPR II, DIN EN 50279), the limit values were not reached by a factor of 20 or more in any of the tests, with 100% compliance in each case.
- Effective shielding basket for G9 LED approx. 1.4 V/m at a distance of 10 cm less than 1 V/m at a distance of 30 cm (according to TCO)
- Electrobiological Quality
- Design and production in Germany

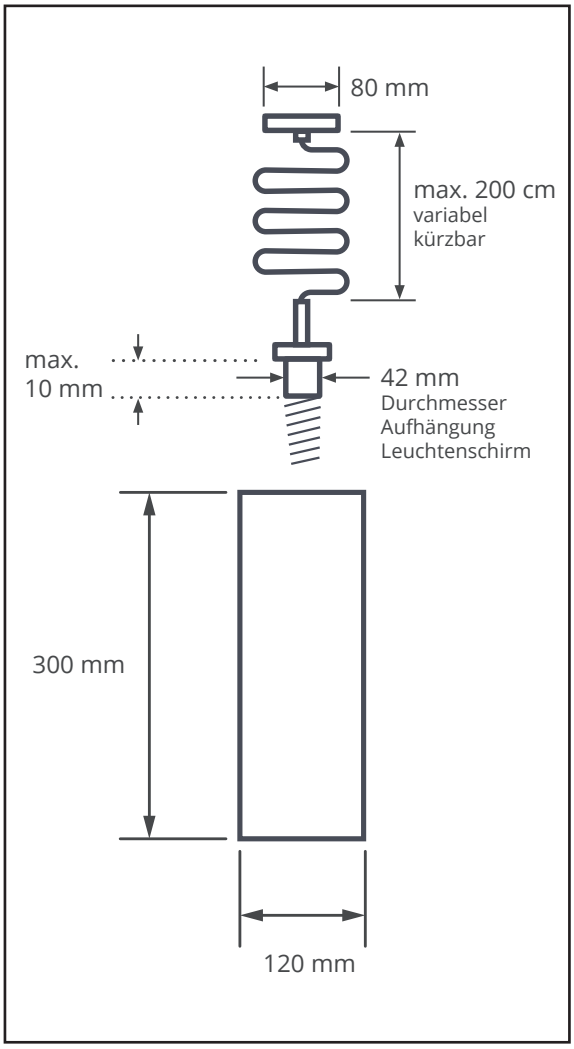


## Package including

Opal glass shade (cylinder), electrical kit with 1 x LM-LED-G9-55 bulb - 5.5 W, 1 x shade holder, 1 x ceiling mount, 1 x pendant with a 200 cm shielded cable (3 x 0.75 mm²), 2 x wall anchors and 2 x screws, E27-to-G9 adapter, instruction manual (The delivery consists of two separately packaged components)

**Order-No.: 400261**
Short-Desc.: LA-VERONA



Biologa Danell GmbH • Hauptstraße 27 • 72336 Balingen • GERMANY • +49 7433 955 7172 • info@biologadanell.com • www.biologadanell.com