Grounding accessories

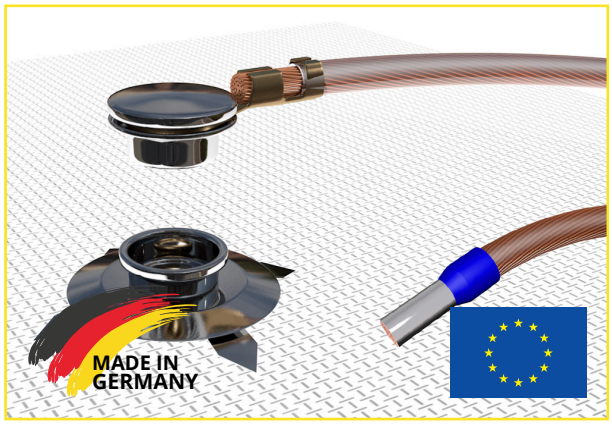

- for safe earthing and conduction of shielding textiles (Dali, Picasso, Topas- ST), as well as the shielding fleece (Rubens Light) and loosely laid building fabrics (Adamantan 003)
- transparent earthing cable with attached snap fastener
- for fixed wiring
- The earthing set-B consists of a 3.5 metre long transparent earthing cable with a push button and a wire end sleeve at each end.

  The push button has an enlarged contact surface for better contact with the umbrella material.

  The wire end sleeve attached to the end is used for fixed wiring at the points provided for this purpose in the electrical installation (socket, fuse box, FPA rail).
- IMPORTANT!
  The necessary installation must be carried out by a qualified electrician. A residual current circuit breaker (FI, RCD ≤ 30mA) must be present in the circuit. This device is a standard part of every electrical installation and will be installed by your electrician if not available.

  All electrical work (work on electrical equipment and installations) must be carried out and inspected by a qualified electrician or under their direction and supervision!

  Only use the earthing set in normally tempered, dry indoor rooms. Do not use outdoors!

Order-No: 710069
Short-Desc.: Grounding set ESB

- **Grounding set ESR-AK or ESB-K** for temporary grounding of screen textiles and fleeces. Very well suited for building biology premeasurements.


Grounding set ESR-AK


Grounding set ESB-K

Grounding accessories
Grounding set-B (ESB)

Technical data

length:	3,5 metre
colour:	transparent
weight:	ca. 100 g
cross section:	2,5 mm²
push button:	part inside: Ø 12 mm pad: Ø 25 mm

Suitable for the following shielding textiles

- shielding fabric Picasso
- shielding knitted fabric Dali
- canopy underlay Topas-ST

Suitable for the following fleeces

- shielding fleece Rubens Light

Suitable for the following construction fabrics

- shielding fabric Adamantan 003





Grounding Accessories
Grounding set ESR-AK

Technical data

length, colour, cross-section:	3,5 metre, transparent, 2,5 mm²
tapping clamp:	insulated on both sides

Grounding accessories
Grounding set ESB-K

Technical data

length, colour, cross-section:	3,5 metre, transparent, 2,5 mm²
tapping clamp:	insulated on one side
push button:	inner part: Ø 12 mm support: Ø 25 mm

Order-No.: 721165
Short-Desc.: Grounding set ESR-AK

Order-No.: 721165
Short-Desc.: Grounding set ESR-AK

Biologa Danell GmbH • Hauptstraße 27 • 72336 Balingen • GERMANY • +49 7433 955 7172 • info@biologadanell.com • www.biologadanell.com